



# SARONIC

Saronic (EU) Power Tech GmbH  
ADD: Neuer wall 10, 20354 Hamburg Germany

## M72PCS-305W 300W 295W 290W Product Specification




- Industry leading module power output warranty
- International quality, safety and performance certifications
- High-reliability with guaranteed 0/+5 Wp peak power
- Manufacturing facility certified to ISO9001 Quality Management System standards
- Beautiful appearance, good durability & easy installation
- Special design in accordance with requirements of customers

### CERTIFICATES




### WARRANTIES

- 10 years for product defects in materials & workmanship
- 10 years for 90% of warranted minimum power output
- 25 years for 80% of warranted minimum power output

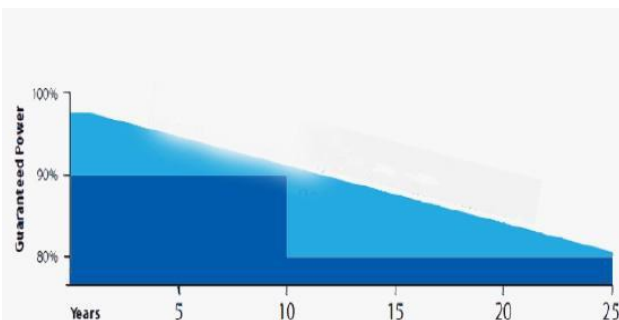


25 years linear warranty

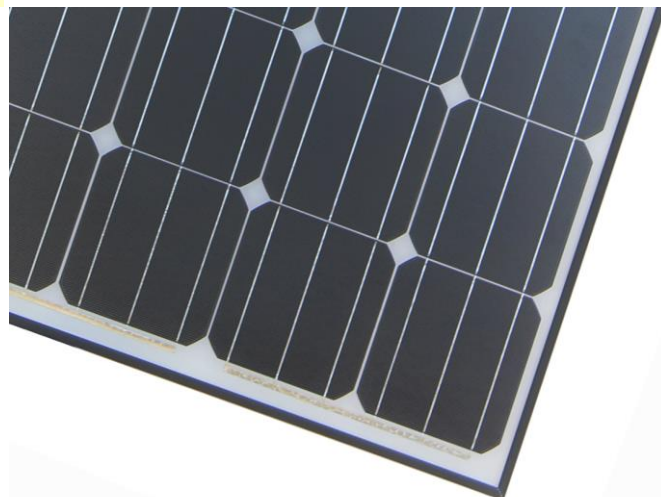

**Electrical parameters at Standard Test Conditions**  
(STC:AM=1.5, 1000W/m<sup>2</sup>, cells Temperature 25°C)

**I-V CURVE**

Typical Type	305W	300W	295W	290W
Max-Power (Pmax) w	305W	300W	295W	290W
Max-Power Voltage (Vmp)	37.34	37.13	36.92	36.77
Max-Power Current (Imp)	8.17	8.08	8	7.9
Open-Circuit Voltage(Voc)	46.3	46.11	45.93	45.74
Short-Circuit Current (Isc)	8.67	8.64	8.63	8.59
Max-System Voltage	DC1000V(TUV)/600V(UL)			
Cell efficiency (%)	18.1	17.78	17.5	17.2

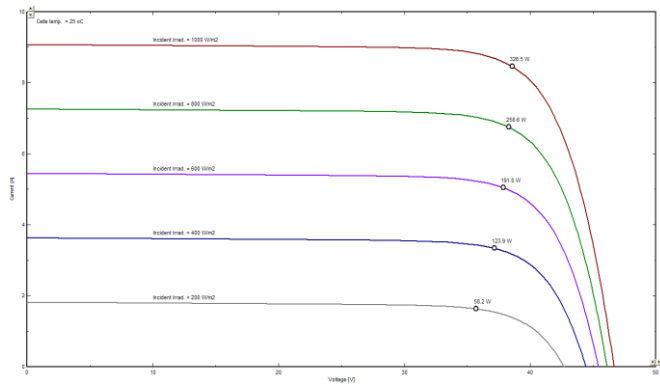

**MECHANICAL DATA**

**TEMPERATURE CHARACTERISTICS**


Dimensions	1956*992*50mm
Weight	23kgs
Front Glass	3.2 mm tempered glass
	TUV (2Pfg1169:2007)
Output Cables:	4mm <sup>2</sup> (0.006 inches <sup>2</sup> ), symmetrical lengths 900 mm
Connectors:	MC4 compatible IP67
cell type:	Mono Crystalline silicon, 156mmx156mm
Number of cells:	72 cells in series

Temp.Coeff.of Isc(TK Isc)	0.037% / °C
Temp.Coeff.of Voc(TK Voc)	(-0.34%) / °C
Temp.Coeff of Pmax(TK Pmax)	(-0.48%) / °C
Operating Temperature	(-40~+85)°C
Nominal Operating Cell Temperature	45 ± 2 °C

**PACKING CONFIGURATION**

Container	20'GP	40'GP	40'HQ
Pieces per Pallet	38	38	46
Pallets per Container	5	11	11
Pieces per Container	190	418	506

**DIMENSIONS AND STRUCTURE**

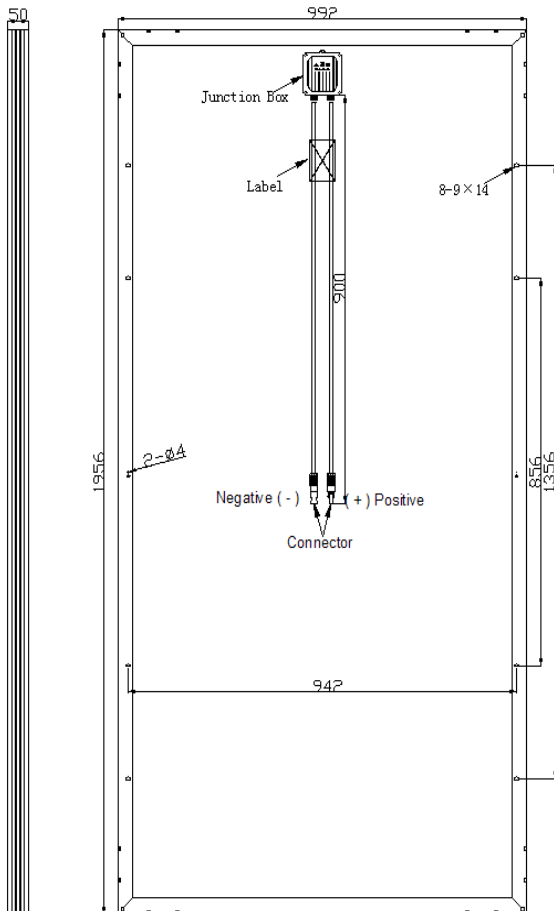

**TESTS, CERTIFICATIONS AND WARRANTIES**

Standard tests	IEC 61215, IEC 61730
System certs	ISO 9001, ISO 14001
Certifications	TUV, CE, MCS, PV CYCLE, CEC, CHUBB
Extreme wind and snow loads testing	withstand extreme wind (3800 Pascal) and snow loads (5400 Pascal)
Positive tolerance	0~+3%
Junction Box	≥ IP65 Rated
Warranties	10-year material and workmanship and 25-year output at least 80%.